

# MP58 Mobile Drucker



project		model
parameter name		MY58
Printer data	Print type	Thermal line printer
	Fast Print speed	50mm/s
	Resolution	203dpi
	Point distance	0.125mm
	Valid print width	48mm
	Paper	Thermal receipt roll paper, thermal sticker paper
Print material	Paper width	Bill: 58mm Label: 50mm, 40mm, 30mm
	Paper thickness	0.05-0.18mm
	Paper roll outer diameter	Max 40mm
	Paper loading	Clamshell paper loading, easy loading paper
	Out paper type	Top exit; thermal side facing out
	Cutter type	Plastic tear knife, manual tear off
Print comment	Font English	Height: 16, 24
	Font Chinese	Null
	Encoding	ASCII; GBK (GB18030 double) ; Unicode (Chinese characters)
	Print characters	English, Chinese characters, numbers, various symbols
	Rotation print	0 degree, 90 degree, 180 degree, 270 degree
	Bar code	EAN—8、EAN—13、ITF、UPC—A、UPC—E、Code bar、Code93、Code39、Code128
	2D bar code	QR Code, PDF417, Data Matrix, Grid Matrix
	Bitmap	Black and white bitmap (line, curve, table, picture)
Physical characteristics	Machine Size	101.8mm*86.7mm*48mm
	Bare metal weight	188g(Including battery without paper)
	Package Size	128.5mm*93mm*53.5mm
	With package weight	276g
	Carton Size	413mm*303mm*360mm

	<b>Carton Quantity</b>	54
	<b>Carton Weight</b>	15.5kg
<b>Interactive interface</b>	<b>Input</b>	2 pc Key button
	<b>Output</b>	Status indicator, battery indicator
	<b>USB Communication Interface</b>	USB-Type-C
	<b>Wireless communication interface</b>	Bluetooth 4.2(SPP+BLE)
	<b>Label detect</b>	Reflective label detection, no virtual slit, label slit >=2mm
	<b>Black mark detect</b>	The middle black mark detection, the black mark is on the printing surface, the position reference picture <sup>Ⓐ</sup>
	<b>Warning</b>	Out of paper prompt; open cover detection; low battery prompt; overheat prompt
	<b>Command</b>	ESC/POS
<b>Power</b>	<b>Battery capacity</b>	3.7V 1800mAh Lithium
	<b>Battery removable capacity</b>	Detachable
	<b>Adapter</b>	Input: AC 100-240V 0.5A, Output: DC 5V1A
	<b>Data line</b>	USB-Type-C
<b>Environmental parameters</b>	<b>Operating temperature</b>	0~50 ° C
	<b>Storage temperature</b>	-20~60° C
	<b>Operating humidity</b>	35%~85% No condensation
	<b>Storage humidity</b>	10%~90% No condensation
<b>Reliability</b>	<b>Print life</b>	50Km (1 2.5% Print density) / 100million pulse
	<b>Battery lift</b>	300 cycles of charge and discharge > 60% battery
	<b>One charge print length</b>	About 100m (12.5% printing density)
	<b>Certification</b>	CCC
<b>Other data</b>	<b>Print data setup</b>	Use button settings
	<b>Charging time</b>	4 hours
	<b>Standby time</b>	60 hours




LMK Präzisionswerkzeuge und Handels GmbH  
 Wirtsgrund 33  
 96450 Coburg  
 Tel.: +49 9561 31 94 958  
[info@lmk-werkzeugbau.de](mailto:info@lmk-werkzeugbau.de)  
[www.lmk-werkzeugbau.de](http://www.lmk-werkzeugbau.de)

## T45 Etikettendrucker



4x6" Thermodrucker für Desktop-Versandetiketten – Ideal zum Drucken von Versandetiketten, Barcode-Etiketten oder Inventaretiketten, zum Drucken von Lebensmitteletiketten, Barcode-Aufklebern oder Preisschildern im Einzelhandel usw.

1. Größe: 226 x 183 x 150 mm
2. Maximale Papierbreite: 114 mm
3. Druckbreite: 108 mm
4. Die maximale Druckgeschwindigkeit beträgt 150 mm/s.
5. Schnittstellen: USB, Bluetooth, Dual-Modus
6. Barcode: EAN-8, EAN-13, ITF, UPC-A, UPC-E, Code Bar, Code93, Code39, Code128

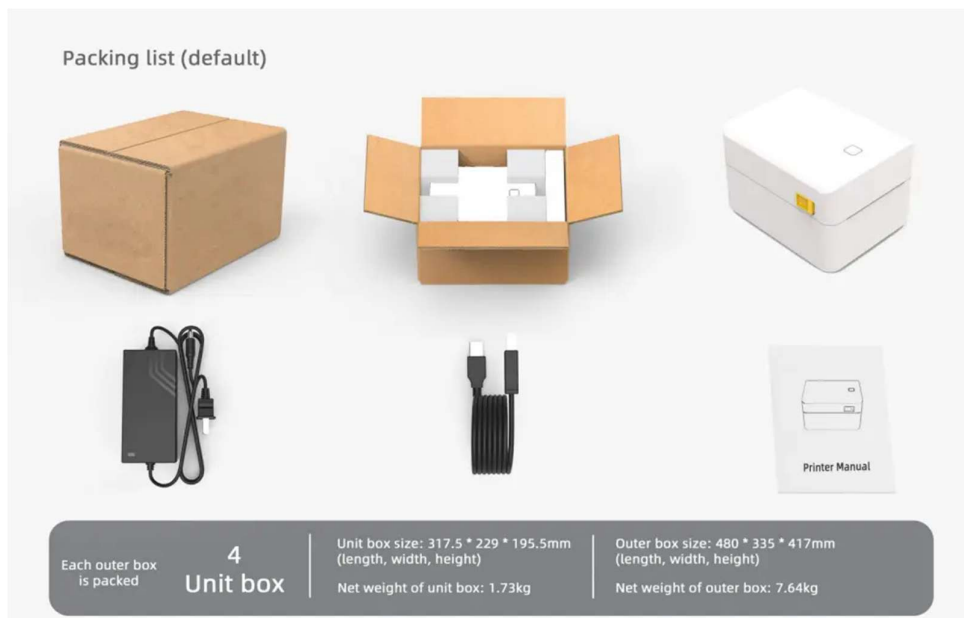

## Paket

- 1 Thermodrucker,
- 1 Adapter,
- 1 USB-Kabel,
- 1 Handbuch

<b>Thermodrucker</b>	<b>Artikelnummer</b>		<b>TE45</b>
		Name	4-Zoll/108-mm-Thermoetikettendrucker
<b>Druckerparameter</b>		Druckermethode	Thermodirektdruck
		Druckgeschwindigkeit	152 mm/s
		Maximale Auflösung	203 DPI
		Tonhöhe	0,125 mm
		Druckbreite	108 mm
<b>Druckermedien</b>		Typ	Themorollenpapier für Kassenbons, selbstklebendes Thermorollenpapier, selbstklebendes Thermorollenpapier ohne Trägerfolie
		Papierbreite	W≤20-114mm
		Außendurchmesser der Papierrolle	D≤127
		Papierladeverfahren	Klappdeckel-Ladung, einfaches Beladen
		Papierausgabemethode	Leistung nach oben, thermische Seite nach außen
		Papierschneidemethode	Handmesser zum Abreißen von Papier, manuelles Abreißen
<b>Physikalische Eigenschaften</b>		Abmessungen	222,5 × 174 × 148,5 mm
		Verpackungsgröße	315,5 × 229 × 195,5 mm
		Gewicht	1245 g
		Farbe	Weiß
		Material	ABS, PC

<b>Interagieren</b>		Drahtlose Schnittstelle	Bluetooth 4.2 (SPP+BLE), WLAN optional
		Kabelgebundene Kommunikationsschnittstelle	USB Typ B
		Programmierbefehl	TSPL
		Etikettenerkennung	Erkennung von reflektierenden Etiketten
<b>Stromversorgung</b>		Adapter	Standardkonfiguration: Eingang 100–240 V AC, 1,5 A, 50–60 Hz, Ausgang 24 V/2 A DC
		Batteriekapazität	
		Ladezeit	Drucklebensdauer: 150 km (12,5 % Druckdichte)



**LMK Präzisionswerkzeuge und Handels GmbH**

Wirtsgrund 33

96450 Coburg

Tel.: +49 9561 31 94 958

[info@lmk-werkzeugbau.de](mailto:info@lmk-werkzeugbau.de)

[www.lmk-werkzeugbau.de](http://www.lmk-werkzeugbau.de)

# X35 Mobile Drucker



project		model	
parameter name		X35	
Printer data	Print type	Thermal line printer	
	Fast Print speed	80mm/s	
	Resolution	203dpi	
	Point distance	0.125mm	
	Valid print width	72mm	
	Paper	Thermal receipt roll paper, thermal sticker paper	
Print material	Paper width	W≤80mm,Multi-width compatible:80,75,70,65,.....15mm	
	Paper thickness	0.05-0.18mm	
	Paper roll outer diameter	D≤50mm	
	Paper loading	Clamshell paper loading, easy loading paper	
	Out paper type	Top exit; thermal side facing out	

	<b>Cutter type</b>	Hardware paper tearing knife, manual tearing off
<b>Print comment</b>	<b>Font English</b>	Height: 16, 20, 24, 28
	<b>Font Chinese</b>	Height: 16, 20, 24, 28
	<b>Encoding</b>	ASCII; GBK (GB18030 double) ; Unicode (Chinese characters)
	<b>Print characters</b>	English, Chinese characters, numbers, various symbols
	<b>Rotation print</b>	0 degree, 90 degree, 180 degree, 270 degree
	<b>Bar code</b>	EAN - 8、EAN - 13、ITF、UPC - A、UPC - E、Code bar、Code93、Code39、Code128
	<b>2D bar code</b>	QR Code, PDF417, Data Matrix, Grid Matrix
	<b>Bitmap</b>	Black and white bitmap (line, curve, table, picture)
<b>Physical characteristics</b>	<b>Machine Size</b>	102mm*113mm*57mm
	<b>Bare metal weight</b>	390g(Including battery without paper)
	<b>Package Size</b>	130mm*193mm*64mm
	<b>With package weight</b>	500g
	<b>Carton Size</b>	384mm*345mm*395mm
	<b>Carton Quantity</b>	20
	<b>Carton Weight</b>	10kg
<b>Interactive interface</b>	<b>Input</b>	3 pc Key button
	<b>Output</b>	Status indicator, TFT
	<b>USB Communication Interface</b>	USB-Type-C
	<b>Wireless communication interface</b>	Bluetooth 4.2(SPP+BLE)
	<b>Label detect</b>	Reflective label detection, no virtual slit, label slit >=2mm
	<b>Black mark detect</b>	The middle black mark detection, the black mark is on the printing surface, the position reference picture <sup>Ⓐ</sup>
	<b>Warning</b>	Out of paper prompt; open cover detection; low battery prompt; overheat prompt
	<b>Command</b>	ESC/POS
<b>Power</b>	<b>Battery capacity</b>	7.4V 2000mAh Lithium
	<b>Battery removable capacity</b>	Detachable
	<b>Adapter</b>	Input: AC 100-240V 0.5A, Output: DC 5V1A
	<b>Data line</b>	USB-Type-C
<b>Environmental</b>	<b>Operating temperature</b>	0~50 °C

<b>parameters</b>	<b>Storage temperature</b>	- 20 ~ 60°C
	<b>Operating humidity</b>	35% ~ 85% No condensation
	<b>Storage humidity</b>	10% ~ 90% No condensation
<b>Reliability</b>	<b>Print life</b>	50Km (1 2.5% Print density) / 100million pulse
	<b>Battery lift</b>	300 cycles of charge and discharge > 60% battery
	<b>One charge print length</b>	About 200m (12.5% printing density)
	<b>Certification</b>	CCC
<b>Other data</b>	<b>Print data setup</b>	Use button settings
	<b>Charging time</b>	3.5 hours
	<b>Standby time</b>	135 hours



LMK Präzisionswerkzeuge und Handels GmbH  
 Wirtsgund 33  
 96450 Coburg  
 Tel.: +49 9561 31 94 958  
 info@lmk-werkzeugbau.de  
 www.lmk-werkzeugbau.de

# M20 Mobile Drucker



Der M20 Mini-Desktop-Belegdrucker wurde für Effizienz und Vielseitigkeit entwickelt. Mit seinen kompakten Abmessungen von 108,5 x 88 x 46,5 mm eignet sich dieser Drucker perfekt für jeden Arbeitsplatz, ob zu Hause, im Büro oder im Lager.

Tragbarer Thermodrucker im Taschenformat für Etiketten, Lieferscheine, Preisschilder, Barcodes, 2 Zoll, 58 mm Papierbreite - Perfekt für alle Ihre Druckeranforderungen.

1. Größe: 108,5 x 88 x 46,5 mm
2. Maximale Papierbreite: 15–58 mm
3. Druckbreite: 48 mm
4. Die maximale Druckgeschwindigkeit beträgt 80 mm/s.
5. Schnittstellen: Bluetooth, serielle Schnittstelle (integrierter USB- Anschluss), Mini-USB



project		Model	
parameter name		M20-S	
Print parameter	Print Type	Thermal line printer	
	Fast Speed	50mm/s	
	Resolution	203dpi	
	Point distance	0.125mm	
	Print Width	48mm	
Paper parameter	Paper	Thermal receipt roll paper	
	Width	Max 58mm	
	Thickness	0.05-0.11mm	

	Roll diameter	Max 40mm	
	Paper In	Clamshell paper loading, easy paper loading	
	Paper Out	Paper out on top; thermal side facing out	
	Cutting	Metal tearing knife, manual tearing off	
Content	Font AscII	Height: 16, 20, 24, 28	
	Font GB18030	Height: 16, 20, 24, 28	
	Encoding	ASCII; GBK (GB18030) ; Unicode (Chinese characters)	
	character	English, Chinese characters, numbers, various symbols	
	Rotate	0° , 90° , 180° , 270°	
	Barcode	EAN-8; EAN-13; ITF; UPC-A; UPC-E; Codebar; Code93; Code39; Code128;	
	2D Barcode	QRcode	
	Picture	1 Bit Bitmap (Line, Curve, Table, Picture)	
Pack Characteristics	Machine Size	108.5mm*88mm*46.5mm	
	Machine Weight	205g(With Battery, No paper)	
	Package Size	177mm*105mm*54mm	
	Carton Size	384mm*345mm*295mm	
	Carton quantity	30 sets/box	
	Carton Weight	9.99Kg/box	
UI	Input	One Button	
	Output	Buzzer; indicator light	
	Wired communication	Mini USB 5Pin	
	Wireless communication	Bluetooth 4.2 ble supports Android IOS	
	Label Check	None	
	Mark Check	One on the left	
	Warning	No Paper, Cover Opened, Overheat, Low Power	
	Driver	Android SDK; IOS SDK	

	Program	ESC / POS	
Power	Battery	3.7V 2000mAh lithium ion	
	Battery place	Inside, can not be took outside	
	Charger	Input:100-240AC 0.5A, Output: 5V1A DC	
Environment- al parameters	Operating Temperature	0~50 °C	
	Storage Temperature	-20~60 °C	
	Operating Humidity	35%~85% non condensation	
	Storage Humidity	10%~90% non condensation	
Reliability	TPH Life	50Km (12.5% Density) / 100 million pulse	
	Battery llife	500 cycles	
	Print Length	About 220m for one charge	
	Antistatic grade	3000V	
	Certificatlons	CE	
Other data	Print data setup	Use APP to set black level	
	Feed Back	No	
	Charge Time	4 hour	
	Standby	160 hour	
	Standard accessories		
	Optional accessories	European standard, American standard, etc. power adapter; car adapter; special data cable; special leather case; special wear parts	



LMK Präzisionswerkzeuge und Handels GmbH  
 Wirtsgrund 33  
 96450 Coburg  
 Tel.: +49 9561 31 94 958  
 Info@lmk-werkzeugbau.de  
 www.lmk-werkzeugbau.de